

MODULAR

Double Clip for CNC Machining

CNC-compatible connector for furniture and interior construction





Modular flat
Double Clip CNC
Art.-No.: Z4036/B

Benefits for industrial processing

- CNC-optimised: simple, standardised milling geometry for series processes
- Process-reliable: self-clamping connection without readjustment
- Detachable & reusable: ideal for modular systems and disassembly concepts
- Concealed connection: no visible screws or fittings
- Time-efficient: quick assembly and disassembly
- Material-independent: suitable for solid wood, MDF, chipboard, multiplex and composite materials
- Suitable for series production: consistent quality for large quantities
- Flat packing possible

The **MODULAR Double Clip** is a flat connector designed for concealed face-mounted connections that requires no end-grain machining. This enables a particularly efficient, precise, and material-friendly installation – ideal for modern interior fit-outs and high-quality furniture constructions.

In combination with **MODULAR shoulder screws**, it creates a self-tightening, immediately load-bearing, and fully detachable connection. The double clip geometry allows reversible installation and makes the connector an ideal solution for modular systems. High-strength spring steel ensures long-lasting stability and durability.

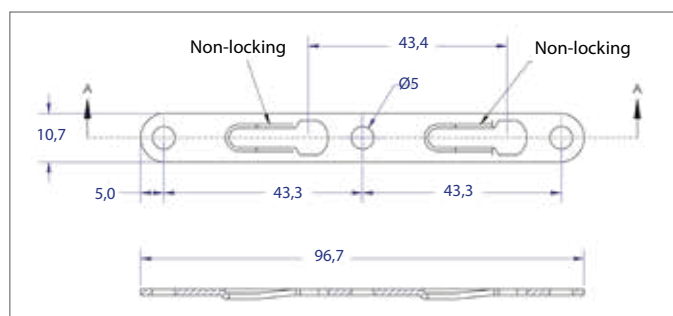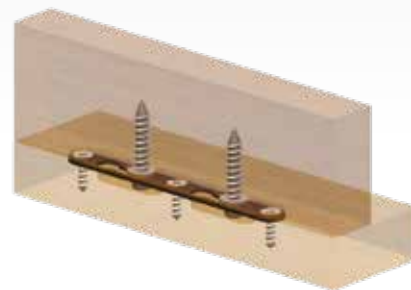

To ensure optimum fastening, we recommend using M4.8 × 10 Euro screws. Alternatively, depending on the material thickness and application, counter-sunk screws with a nominal diameter of approx. 3.5 mm and a length of 13 mm or 16 mm can be used.

Applications:	Ready-to-assemble furniture (RTA) and cabinet furniture; furniture manufacturing and shopfitting; tables, chairs and interior wall panelling; modular furniture systems and interior fittings
Advantages:	Concealed fastener for industrial series production, CNC machining and modular furniture and interior fitting systems, flat packing possible
Suitable material:	Spring steel, phosphated surface
Installation:	Pocket depth (milling depth): 3.1 mm nominal (up to max. 3.3 mm to increase preload) Milling dimensions: 97 × 11 mm
Mounting:	Modular shoulder screws
Accessories:	Modular shoulder screws, e.g. Art.-No. 2055, 2155, 5068, 5070



All MODULAR connectors
are available in the online shop!



PRODUCT



VIDEO

Knapp GmbH | Wassergasse 31 | A-3324 Euratsfeld | Tel.: +43 (0)7474 / 799 10 | Fax: +43 (0)7474 / 799 10 99
Tel.: +49 (0)8106 / 99 55 99 0 | E-Mail: info@knapp-verbinder.com | www.knapp-verbinder.com



KNAPP®
connectors.com